The efficient and reliable method to bundle carton boxes, bank notes, letters, printed matter, or textiles. The versatility of our

Twine Tyers is almost unlimited: angular or round packages, soft or firm products.








S42EN-BUNDLING MACHINE

TECHNICAL DETAILS AND SPECIFICATION

- provides a securely tied package using polyethylene, cotton or elastic twine with a quick and easy operation, ideal for any packing application
- single, double, triple or cross tying
- up to 50 cycles per minute single wrap
- meets worldwide standards for safety, CE approved
- uses the unique Jet 2000 Knotter Unit
- PLC- controlled with LED function display
- variable string tension
- easily accessible for maintenance
- compact and mobile, can be used anywhere, requires only 230 Volt, single phase

Power supply 230 Volt, single phase 50/60 Hz, 0.7 kW Sound pressure level 72 dB (A) +/-1 Net weight 150 kg

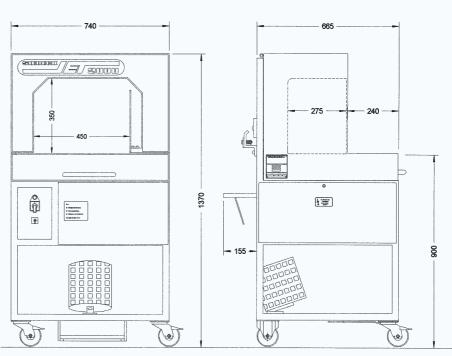

All measurements in mm, specification are subject to change without notice

